

### INSTALLATION INSTRUCTIONS:

The instructions below assume you have installed your net posts or are using existing net posts.

Step 1: Begin installing your net by taking one loop end of the net cable, placing it over the top of the terminal net post cap (the net post without the crank) and securing the loop to the hook on the net post.

Step 2: Next, place the other net cable loop over the top of the net post cap on the opposite end and run it down the side of the post into the crank.

Step 3: External wind crank (Image 1): Loosen the screw on the silver part of the internal winder. With screw facing the net post, slip the net loop under the washer, then tighten the screw.

Internal wind crank (Image 2): Cut the net cable loop off near the end and insert the cable into the hold on the flat face of the internal winder.

Step 4: Use crank handle to tighten net. Net should be 42" tall at the singles sideline (Image 3) and over 36" tall at the net center (Image 4).

Step 5: Place one net dowel in each net side pocket.

Step 6: Install lacing cord by creating a knotted loop at one end of your cord. Next, run the other end of the cord through both headband grommets, around the net post, through the knotted loop and back around the post in the opposite direction (Image 5). Take the cord and put it through the lacing rods (or around post) and through each grommet creating a zig-zag pattern (Image 6). Tie off the cord at the base of the post using the bottom pin or net post.

Step 7: Finally, install the center strap over the center point of the net at midcourt. Clip one end of the center strap to the pipe anchor bar. Weave the last 6" of the other end of the center strap through the net then clip it to pipe anchor so the net lays on the court (removes gap at the bottom of the net). Adjust center strap until net height is 36" at center court.

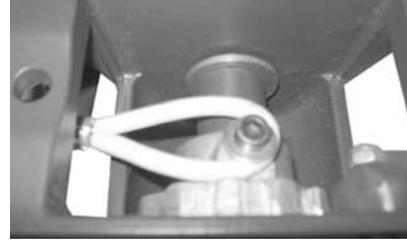


Image 1: external crank cable

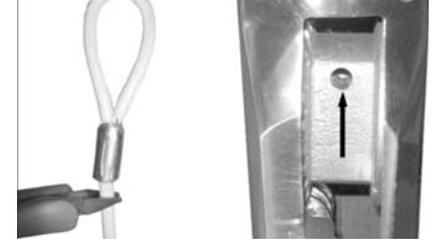


Image 2: internal crank cable

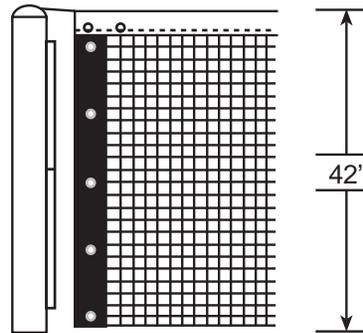


Image 3:




Image 4:


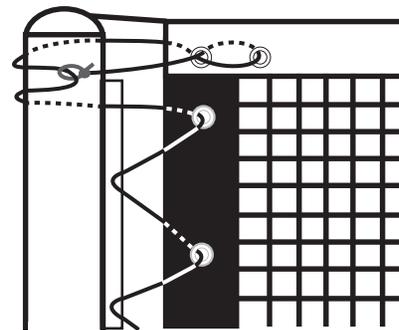


Image 5:

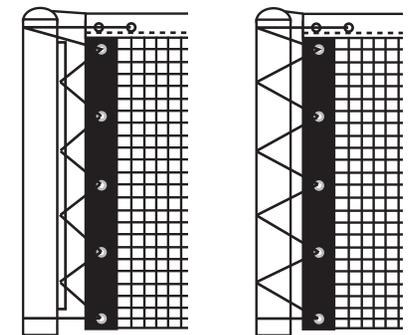

a. w/ rods, b. w/out rods  
Image 6: a. w/ rods, b. w/out rods